

PUSH TYPE PANIC EXIT DEVICES. UNIVERSAL SERIES

Rim model

1930




Rim panic devices with 2 locking points, upper and lower. Steel swing latches.

Standard height: 2210mm.
Outside devices, see page 12 / VE.
Certificación EN 1125:

3 7 6 1 1 3 2 2 A

The box includes:

- » 1 main support and a secondary support.
- » 1 oval shape horizontal bar of 900 mm length.
- » 2 vertical rods of 930 mm.
- » Accessories bag includes: Fixing screws, screws witch support the horizontal bar, 1 square spindle, 2 vertical rod guides and strikes.
- » Assembly instructions and installation template.
- » 2 locking points, upper and lower.

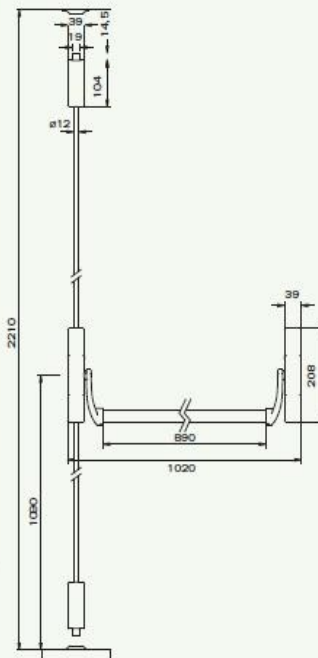

1950



Rim panic devices with 3 locking points, upper, lower and central. Steel swing latches.

Standard height: 2210mm.
Outside devices, see page 12 / VE.
Certification UNE-EN 1125:

3 7 6 1 1 3 2 2 A

The box includes:

- » 1 main support and a secondary support.
- » 1 oval shape horizontal bar of 900 mm length.
- » 2 vertical rods of 930 mm.
- » Accessories bag includes: Fixing screws, screws witch support the horizontal bar, 1 square spindle , 2 vertical rod guides and strikes.
- » Assembly instructions and installation template.
- » 2 locking points, upper and lower.

