

Gege DIN Door Lock Series 170



For inside up to 40 kg door weight - Center distance 72 mm (78 mm for WC model)
 Models bit key (BB), WC- and bathroom doors (WC), Euro profile cylinder without latch lever (PZ),
 Euro profile cylinder with latch lever (WZ)


Requirements according to DIN 18251 Grade 2, BN12209
 Latch with latch stop, right/left changeable
 Double throwlock, WC model single throw.
 Case and lid are made of plate steel – 0.04 in thick – ELO zinc plated
 Lock forend 235 x 18 x 3 mm or 235 x 20 x 3 mm
 in decor silver (DS), round (R) model.



170.BB



170.PZ

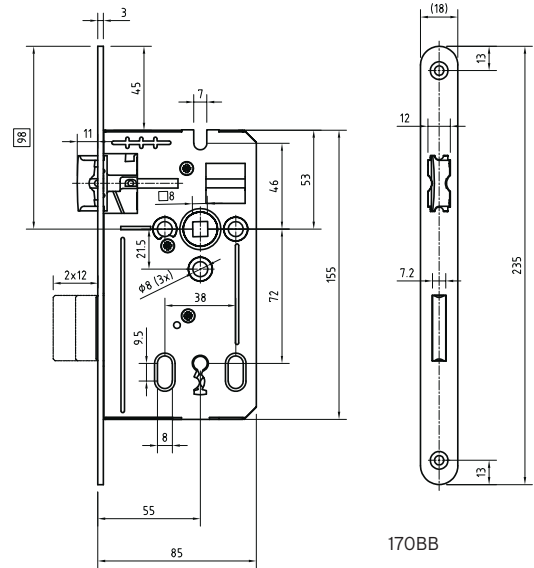

170BB

Style		Center distance	Backset H	Case width E	Rear backset	Forend	Surface finish	Hub	Latch lever	Fire protection	
Forend 235 x 20 x 3 mm											
Bit key	BB		72	55	85	30	round 235 x 20 x 3	Decor silver	8,0	---	---
WC	WC		78	55	85	30	round 235 x 20 x 3	Decor silver	8,0	---	---
Europrofile cylinder	PZ		72	55	85	30	round 235 x 20 x 3	Decor silver	8,0	---	---
Europrofile cylinder	WZ		72	55	85	30	round 235 x 20 x 3	Decor silver	8,0	✓	---
Forend 235 x 18 x 3 mm											
Bit key	BB		72	55	85	30	round 235 x 18 x 3	Decor silver	8,0	---	---
WC	WC		78	55	85	30	round 235 x 18 x 3	Decor silver	8,0	---	---
Europrofile cylinder	PZ		72	55	85	30	round 235 x 18 x 3	Decor silver	8,0	---	---
Europrofile cylinder	WZ		72	55	85	30	round 235 x 18 x 3	Decor silver	8,0	✓	---

• Special models

Forend: 220x20x3 mm, Decor silver, yellow zinc plated

Forend: 235x24x3 mm, stainless steel, square

Backset: 50,60

WC center distance: 72 mm in

Latch lock: Latch lock with latch lever

WZ: Fire retardant