


Fallenschloss mit Doppelfunktion

Slam lock with double function

Material: Zamak, vernickelt / Zinc alloy, nickel plated

Schließweg / Locking direction	Art. No.
Rechts / Right hand	1151.300
Links / Left	1151.200
Lad / Drawer	1151.100




Schieber in rechter Stellung:

Die Falle bleibt im geöffneten Zustand arretiert, wenn der Schlüssel um 180 Grad gegen den Uhrzeigersinn gedreht wird. Nur in dieser Position kann der Zylinderkern ein- und ausgebaut werden, sowie der Schlüssel abgezogen werden!

Push bolt into right position:

Latch snaps into position when lock is closed. Latch will be held in open position by turning the key 180 degr. anti-clock wise. Core installation or removal only possible in this position and key can be removed!




Schieber in linker Stellung:

Die Falle wird nicht im geöffneten Zustand arretiert. In dieser Position ist der Schlüssel und der Zylinder nicht herausziehbar.

Push bolt into left position:

Slam latch does not lock in open position. In this position the key and the core are not removable.

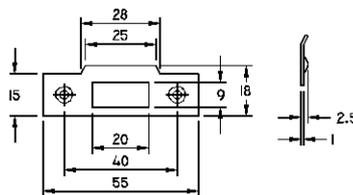


Schließblech / Striking plate

Material: Stahl / Steel

Oberfläche / Finish	Art. No.
Vernickelt / Nickel plated	1501.105



Rosetten bitte extra bestellen, siehe Seite 1.011
Rosettes please order separately, refer to page 1.011



Schließblech / Striking plate

Material: Stahl / Steel

Oberfläche / Finish	Art. No.
Vernickelt / Nickel plated	1451.060

Maßangaben unverzüglich / Dimensions not binding